

CT4 WASH

CINDY®



● **OPTICAL**

Light Source	27 pcs 40W RGBW 4 in 1 LED
Color Temperature	2800K-10000K adjustable
Beam Angle	4.5° -45°
Luminaire Output	15,500lm
Illuminance (5°)	52,000lux @ 5m
Illuminance (45°)	1,950lux @ 5m
PWM Options	600Hz, 1200Hz, 2000Hz, 4000Hz, 6000Hz, 15000Hz

● **DYNAMIC EFFECT**


LED	Each LED can be individually controlled.
Selectable Pan Ranges	180°, 360°, 540°
Selectable Tilt Range	90°, 180°, 270°
Dimmer	0-100% electronics, 4 dimming curves options.
Strobe	0-25Hz, selectable multiple strobe effects with different speeds.
Zoom	Motorized
Color Mixing	RGBW mixing or CMY mixing

● **ELECTRONIC/OPERATION TEMPERATURE**

Input Voltage	100V-240V, 50/60Hz
Power	1,100W
Temperature (Ambient)	-5° to 45°

● **CONTROL/CONNECTION**

Control Protocol	DMX , RDM , ArtNet , Kling-Net , sACN, WDMX(*optional)
DMX (Single Mode)	21, 129, 243, 297
DMX (Dual Mode) Movement	9, 21, 27
DMX (Dual Mode) Pixel	81, 108, 216
3 pin/5 pin XLR input/output, ethernet input/output	

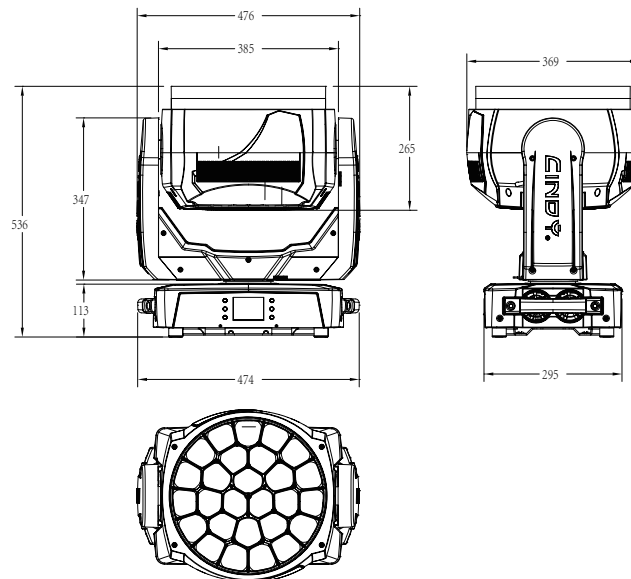

Size	476*369*536mm
Weight	31KG
Housing Colors	Black
Housing Material	High-impact flame-retardant polymer