

CT7 PROFILE

CINDY®



● OPTICAL

Light Source	1000W white LED module
High CRI mode	Ra > 90
Color Temperature	7,000K
Beam Angle	6-57°
Luminaire Output	36,000lm
Illuminance (6°)	72,000lux @ 5m
Illuminance (57°)	2,250lux @ 5m
PWM Options	600Hz, 1200Hz, 4000Hz, 6000Hz, 15000Hz

● DYNAMIC EFFECT


Selectable Pan Ranges	180°, 360°, 540°
Selectable Tilt Ranges	90°, 180°, 270°
Colors	6 colors +white, split colors, rainbow effects at variable speeds.
Colors	CMY, CTO
Gobos	7 rotating glass gobos+open, interchangeable gobos, indexing,rainbow effects at variable speeds.
Framing Shutters	4 individual shutter blades, rotation of module is 120°
Animation wheel	animation effect at variable speeds.
Dimmer	0-100% electronics, 4 dimming curves options.
Strobe	0-25Hz, selectable multiple strobe effects with different speeds.
Focus	Motorized
Zoom	Motorized
Frost1	Heavy frost
Frost2	Light frost
Iris	Motorized
Prism	Prism effect, rotating at variable speeds.

● ELECTRONIC/OPERATION TEMPERATURE

Input Voltage	100V-240V, 50/60Hz
Power	1300W
Temperature (Ambient)	-5° to 45°

● CONTROL/CONNECTION

Control Protocol	DMX, RDM, ArtNet, sACN, WDMX(*optional)
DMX Channels	35, 51
3 pin/5 pin XLR input output, ethernet input/output	

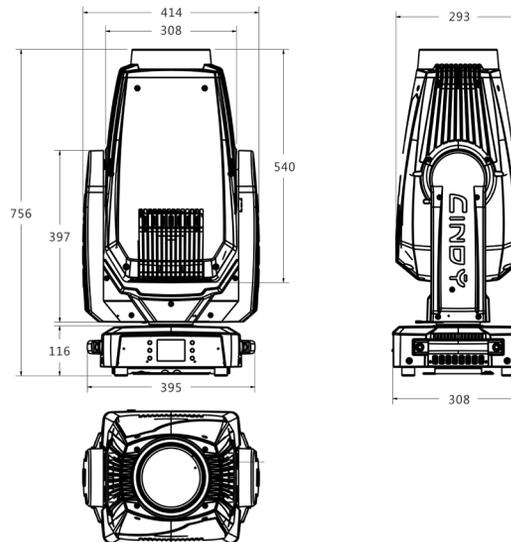

● PHYSICAL

Size	414*308*756mm
Weight	35KG
Housing Colors	Black
Housing Material	High-impact flame-retardant polymer



Products are constantly updated, subject to the actual product without notice