

T3 WASH



● OPTICAL

Light Source	37 pcs 20W RGBW 4 in 1 LED
Beam Angle	12° -52°
Luminaire Output	11,000lm
Illuminance (12°)	15,000lux @ 5m
Illuminance (52°)	1,400lux @ 5m
PWM Options	600Hz, 1200Hz, 2000Hz, 4000Hz, 6000Hz, 15000Hz

● DYNAMIC EFFECT


LED	section control
Selectable Pan Ranges	180°, 360°, 540°
Selectable Tilt Ranges	90°, 180°, 270°
Dimmer	0-100% electronics, 4 dimming curves options.
Strobe	0-25Hz, selectable multiple strobe effects with different speeds.
Zoom	Motorized
Color Mixing	RGBW mixing or CMY mixing

● ELECTRONIC/OPERATION TEMPERATURE

Input Voltage	100V-240V, 50/60Hz
Power	890W
Temperature (Ambient)	-5° to 45°

● CONTROL/CONNECTION

Control Protocol	DMX, RDM
DMX Channels	21, 62, 71, 107
3 pin XLR input/output	

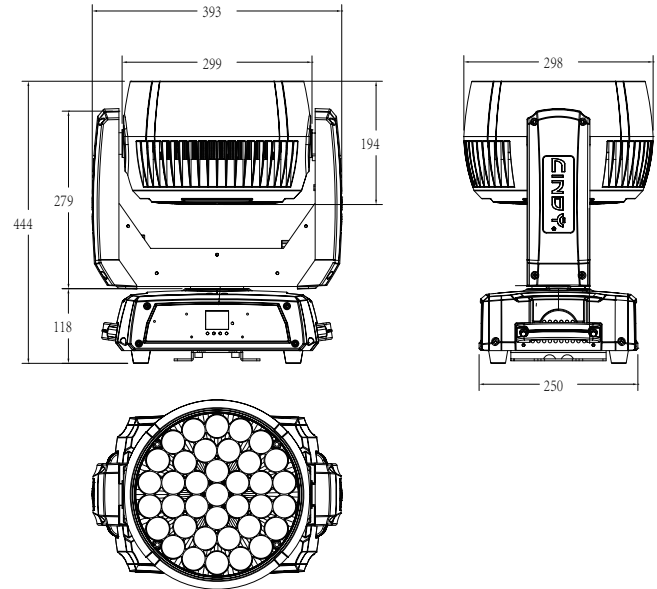

Size	393*298*444mm
Weight	18KG
Housing Colors	Black
Housing Material	High-impact flame-retardant polymer