

T4 SPOT

CINDY®



● OPTICAL

Light Source	400W white LED module
Color Temperature	7,000K
Beam Angle	7° -35°
Luminaire Output	12,000lm
Illuminance (7°)	38,400lux @ 5m
Illuminance (35°)	2,520lux @ 5m
PWM Options	600Hz, 1200Hz, 2000Hz, 4000Hz, 6000Hz, 15000Hz

● DYNAMIC EFFECT


Selectable Pan Ranges	180°, 360°, 540°
Selectable Tilt Ranges	90°, 180°, 270°
Colors	7 colors +white, split colors, rainbow effects at variable speeds.
Gobos 1	7 rotating gobos+open, interchangeable gobos, indexing, rainbow effects at variable speeds.
Gobos 2	8 static metal gobos+open, rainbow effects at variable speeds.
Dimmer	0-100% electronics, 4 dimming curves options.
Strobe	0-25Hz, selectable multiple strobe effects with different speeds.
Focus	Motorized
Zoom	Motorized
Iris	Motorized
Prism	3-facet prism, rotating at variable speeds.

● ELECTRONIC/OPERATION TEMPERATURE

Input Voltage	100V-240V, 50/60Hz
Power	630W
Temperature (Ambient)	-5° to 45°

● CONTROL/CONNECTION

Control Protocol	DMX , RDM
DMX Channels	18, 23
3pin XLR input/output	

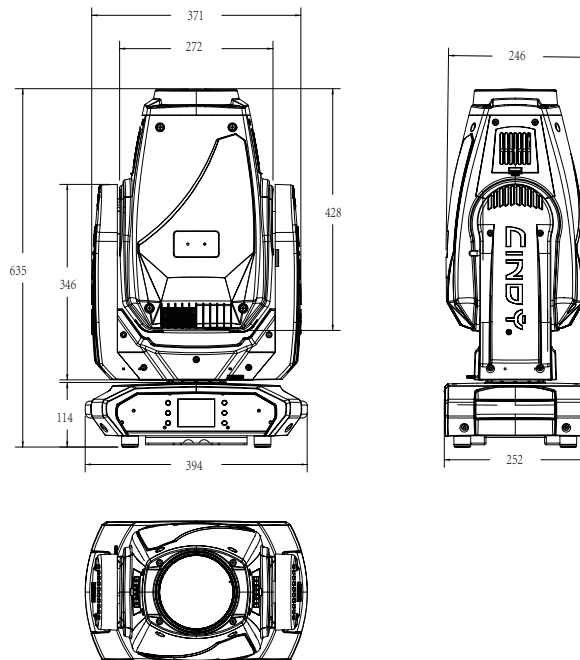

Size	394*252*635mm
Weight	26KG
Housing Colors	Black
Housing Material	High-impact flame-retardant polymer

